


BRS-EBS (MMDS) Accessories

Model 6915 & 11047 3 dB Quadrature Hybrid

Splits input power with a 90 degree phase shift between the two equal outputs for power combining and special antenna configurations. *Ideal for use when combining adjacent digital channels to one antenna.*

Specifications

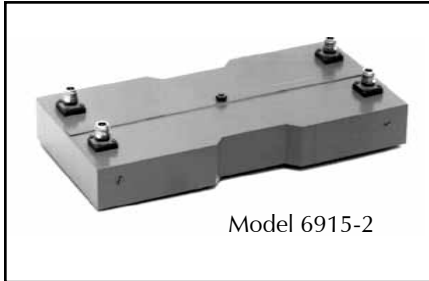

Model 6915-2

Model	Freq.(MHz)	Connector	Outputs	Return Loss	Loss*	Power Rating
6915-1	2050-2400	N Female	3dB \pm 0.5dB	21 dB Min	0.5 dB Max	400W Max
6915-2	2500-2700	N Female	3dB \pm 0.5dB	21 dB Min	0.5 dB Max	400W Max
11047-1	2050-2400	7/8" EIA	3dB \pm 0.5dB	19 dB Min	0.5 dB Max	1800W Max
11047-2	2500-2700	7/8" EIA	3dB \pm 0.5dB	19 dB Min	0.5 dB Max	1800W Max

**Net of 3 dB split loss*

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com