



Ku (Mid) Band Receive Filter


Model 19224

Used for Ku-(mid) band receive applications, this bandpass filter fully rejects the transmit band (**above**) and virtually all undesired transmissions (**below**) the receive band.

- *Ideal for YAHSAT and other Ku-(mid)band Receive Applications*
- *Alternate Flange Configurations are Available Upon Request*

Specifications:

Passband:	11.70 - 12.25 GHz
Insertion Loss:	0.40 dB Approx
VSWR:	1.2:1 Typ
Rejection:	75 dB Min from 12.75 - 14.50 GHz
Flanges:	WR75 Cover (In) / WR75 Grooved (Out)
Dimensions:	7.50" x 1.5" x 1.5" (191mm x 38mm x 38mm)
Finish:	Gloss White Lacquer

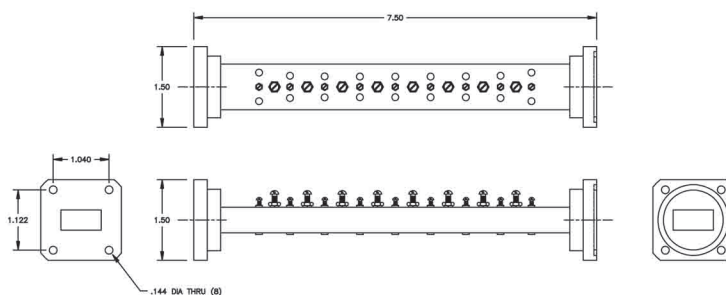

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com