

Radar Interference Filters

Specifications:




Model 10457

Passband	2500-2686 MHz
Insertion Loss	1.2 dB Max
Reject band:	60 dB, 1.8-2.05 GHz
	22 dB @ 2.4 GHz, 12 dB @ 2.72 GHz, 45 dB @ 2.8 GHz
Connectors	N Female
Impedance	50 ohms

Model 10457, Preselector

This bandpass filter provides attenuation on both sides of the band and is also useful for cleaning up low power relay signals.

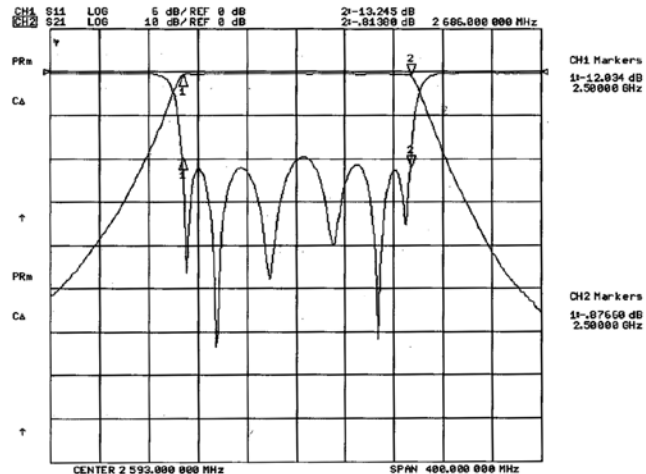

MICROWAVE FILTER CO., INC.
 6743 KINNE STREET, E. SYRACUSE, NY 13057
 E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
 Web: www.microwavefilter.com