



K-Band Receive Reject Filter

Model 19588 Series


Designed for transmit applications, these compact filters provide good rejection of the receive band with minimal effect on the transmit band.

Specifications:

Passband:	27.5 - 31 GHz
Passband Loss:	0.10 dB Typ
Passband VSWR:	1.22:1 Max
Rejection:	40 dB Min from 18.2 – 22 GHz
Flanges:	See Chart (below)
Operating Temp. Range:	-30°C to +40°C
Dimensions:	1.00" x 0.75" x 0.75" (25.4 mm x 19 mm x 19 mm)
Finish:	White Lacquer

Flange Configurations

Model #	Input	Output
19588	WR28 Flat Cover	WR28 Flat Cover
19588-G/F	WR28 Grooved Cover	WR28 Flat Cover
19588-F/G	WR28 Flat Cover	WR28 Grooved Cover
19588-G/G	WR28 Grooved Cover	WR28 Grooved Cover

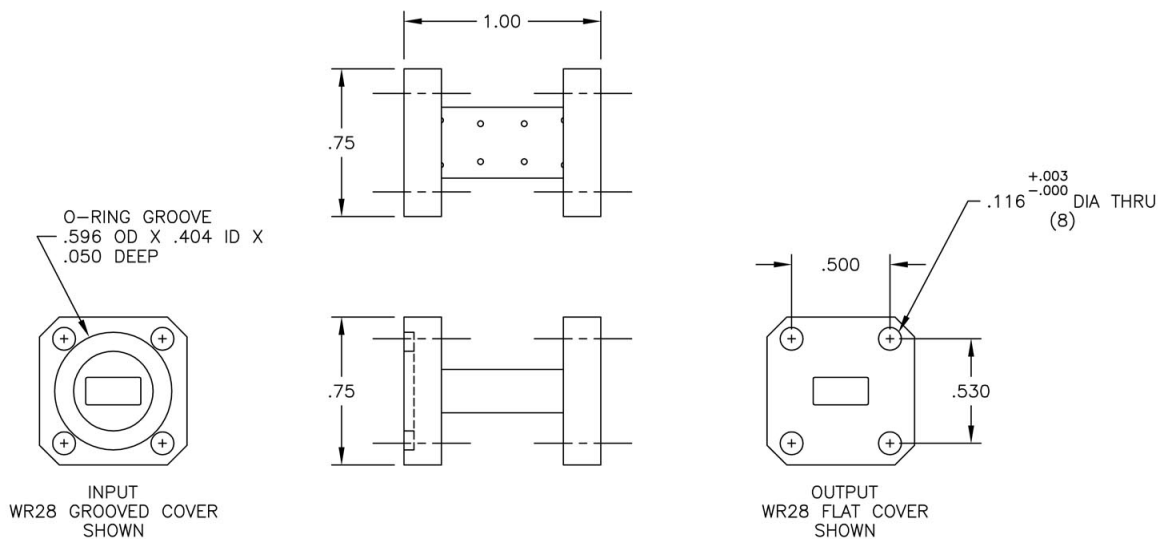

MICROWAVE FILTER CO., INC.
6743 KINNE STREET, E. SYRACUSE, NY 13057
E-Mail: mfcsales@microwavefilter.com

800-448-1666 • 315-438-4700
Web: www.microwavefilter.com