






# Ka-Band Bandpass Filter

## Model 19594

This bandpass filter, developed for airborne radiometer applications, isolates this Ka-band passband from undesired transmissions operating below and above the band.

### Specifications:

Passband:	35.7 – 40.3 GHz
Passband Insertion Loss:	1 dB Typ
Passband VSWR:	1.43:1 Max
Rejection:	60 dB Min @ 33.5 GHz 60 dB Min @ 44.7 GHz
Flanges:	WR28 (Flat) Cover
Dimensions:	2.50" x .75" x .75" (64mm x 19mm x 19mm)
Finish:	White Lacquer

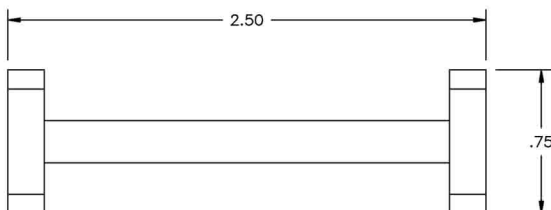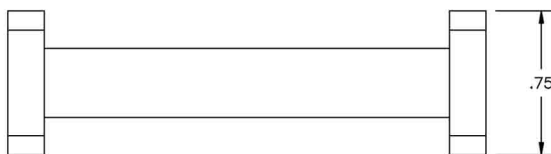

**MICROWAVE FILTER CO., INC.**  
6743 KINNE STREET, E. SYRACUSE, NY 13057  
E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
Web: [www.microwavefilter.com](http://www.microwavefilter.com)