




# EGSM 900 Full Band (Transmit & Receive) Bandpass Filter Model 19072

This filter isolates the EGSM 900 transmit and receive bands from potential interference from other bands operating above and below these bands.



## Specifications:

Passband:	880-960 MHz
Passband Insertion Loss:	1.0 dB Max
Passband VSWR:	1.4:1 Max
Passband Power (CW):	20 Watts Max
Stopbands:	DC – 845 MHz 995 – 2000 MHz
Stopband Attenuation:	40 dB Min
Operating Temperature:	0°C to +50°C
Impedance:	50 Ohms
Connectors:	N-female
Dimensions:	9.27" x 1.70" x 3.00" (235mm x 43mm x 76mm)

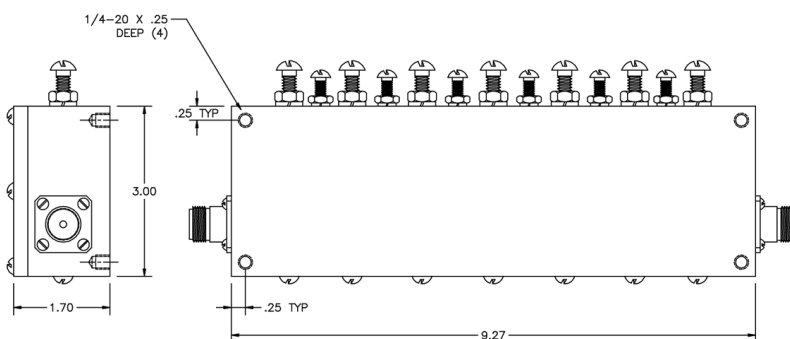

**MICROWAVE FILTER CO., INC.**  
6743 KINNE STREET, E. SYRACUSE, NY 13057  
E-Mail: [mfcsales@microwavefilter.com](mailto:mfcsales@microwavefilter.com)

800-448-1666 • 315-438-4700  
Web: [www.microwavefilter.com](http://www.microwavefilter.com)